

TBA FIREFLY

PASSIVE FIRE PROTECTION

TBA Textiles Pty Ltd
ABN: 44 084 489 529

2

www.tbafirefly.com.au

TBA Protective Technologies

Australia Head Office

Unit 12, 8 Leighton Place
Hornsby, NSW, 2077



TBA Firefly Head

Office

P.O. BOX 52
Laidley
QLD, 4341
Australia

Contact Us

Phone: (07) 5411 4209

Mobile: 0400 966 899

Email: trevor@tbafirefly.com.au



MATERIAL DESCRIPTION

Plus 60 Cavity Fire Barrier is a flexible and lightweight fabric with an inner core of insulating fire protection. Acoustic performance = 46dB room to room.

CERTIFICATION

AS1530.1 Non-Combustibility

CSIRO Report No: FNC11220

Tested and assessed in accordance with:

AS1530.4-2005 and AS4072.1-2005

Exova Warringtonfire Report No: 22766

UNIT OF MEASURE

ROLL

SIZE

6m x 1.3m = 7.8m²

10mm Thick

WEIGHT

2.2kg per m²

FRL 30/30/30

OR

FRL -/60/30

PLUS 60

APPLICATIONS


This easy to install flexible fire barrier is used as a fire engineered solution to continue compartment walls up into the roof void, maintaining both the integrity and insulation of the compartmentation between dwellings, lift shafts and stairwells, ideal for but not limited to strata units. Firefly Plus 60 can also be used to provide inside out / outside in fire protection to boundary walls on both steel and timber framed buildings. The flexibility and fire rating level makes this product perfect for bespoke applications.



Department of Housing NSW



Callignee II Victoria
Flame Zone Construction

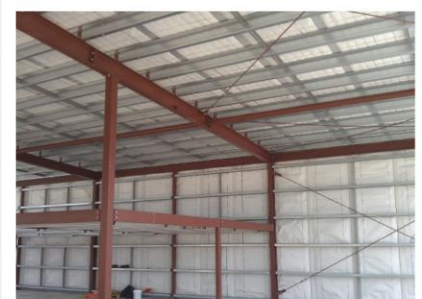

RFS Emergency Services Building
NSW